


The Wild2 provides 1000 lumens of white light with up to 1.5 hours of runtime. Ultra-light and durable, weighing 4.7 ounces, it provides a well-defined hotspot with the perfect balance of spill. Wild2 is primarily made out of 6061-T6 aluminum and a Type III MIL-SPEC hard anodize finish. The device is impervious to dust, sand, and dirt, and is waterproof to 66 feet. Mount the Wild2 in seconds to any gun equipped with a 1913 (e.g., Sig Sauer P320) or Glock Universal (e.g., Gen 3 or Gen 4 Glock) rail. Transition between rail types by reversing the patented INFORCE crossbar in the mounting fixture. All three functions constant, momentary, and strobe — are activated by pressing laterally on either the left or right paddle.



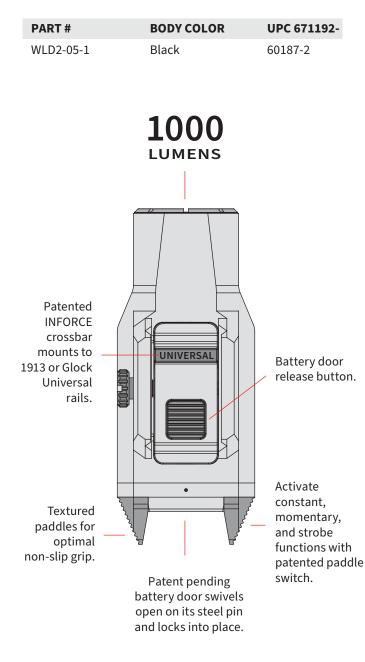

HIGH OUTPUT	1,000 Lumens
PEAK BEAM INTENSITY	25,000 Candela
DISTANCE	1036 Feet/316 Meters
HIGH RUNTIME	1.5 Hours
BATTERIES	Two 123a Included
WEIGHT WITH BATTERIES	4.7 oz/135.0 g
LENGTH	3.5 in/8.9 cm
BEZEL DIAMETER	1.1 in/2.8 cm
SWITCHING	Ambidextrous Paddles
FUNCTIONS	Constant/Momentary/Strobe
LOCKOUT SYSTEM	Paddle Activated
MOUNTING	1913 or Glock Universal Rail
CONSTRUCTION	6061-T6 Aluminum
FINISH	MIL-SPEC Hard Anodize
WATERPROOF	Up to 66 Feet/20 Meters

© 2020 Emissive Energy Corp. 135 Circuit Drive, North Kingstown, RI 02852 USA; Tel: 401-294-2030; www.inforce-mil.com. U.S. & International patents are pending. Manufactured in the U.S.A. of domestic & foreign components.